300/4 four-channel full-range amplifier

+12V and Ground Connections:
Accept up to 4ga. wire directly (without the need for ring or spade terminations.)

Independent Front and Rear Filters:
Fully variable from 50-5,000 Hz with 12dB or 24dB per octave slopes. Each filter can be configured for high-pass or low-pass operation (or defeated.)

Selectable Input Range:
Dual range (200mV-2V or 800mV-8V) permits connection to everything from the weakest line-level sources to speaker level sources from factory or aftermarket head units. Front and rear inputs are independently adjustable.

Front Speaker Output Connections:
Accept up to 8ga. wire directly (without the need for ring or spade terminations.) The same applies to the rear speaker outputs.

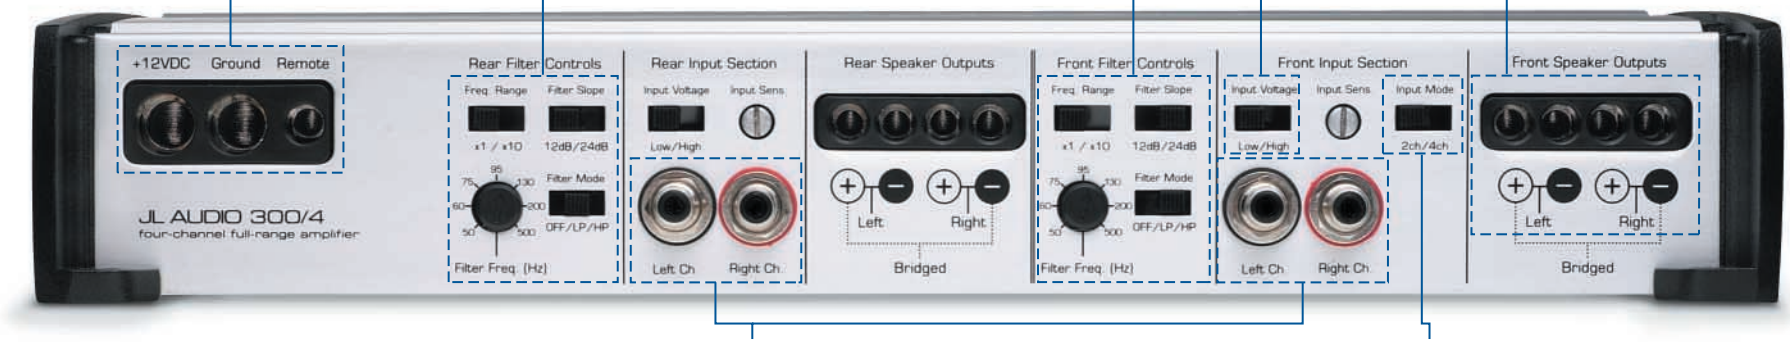

Front and Rear Differential-Balanced Input Topology:
Delivers the noise-rejection advantages of a balanced input section without the need for specialized connectors. Solid, nickel-plated brass, panel-mounted jacks for superior integrity and longevity.

2-Channel or 4-Channel Input:
All four amplifier channels can be driven by either 2 or 4 channels of input. In either mode, the input sensitivity of the front and rear channels must be set independently.